


Dadi esagonali ANSI B 18.2.2

Hex nuts ANSI B 18.2.2

Ecrous hexagonaux ANSI B 18.2.2

Sechskantmuttern ANSI B 18.2.2

UNC
UNF

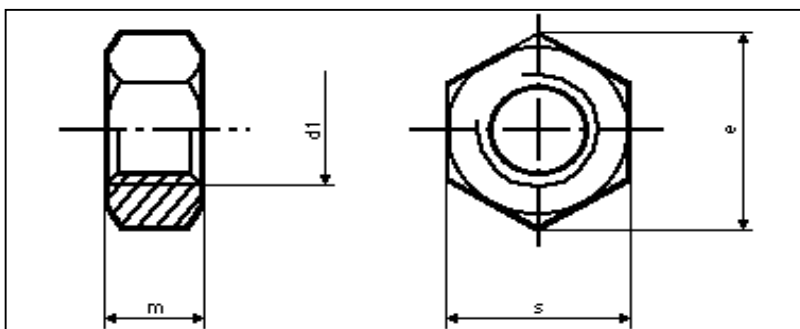

d1	UNC fil. per pollice	UNF fil. per pollice	e min.	s max.	m	peso (7,85 Kg/dm ³) Kg per 1000 pezzi
1/4"	20	28	12,39	11,11	5,55	3,30
5/16"	18	24	14,15	12,7	6,75	5,00
3/8"	16	24	15,95	14,28	8,33	7,30
7/16"	14	20	19,51	17,46	9,52	12,90
1/2"	13	20	21,34	19,05	11,11	17,90
9/16"	12	18	24,94	22,22	13,89	26,40
5/8"	11	18	26,69	23,81	13,89	33,20
3/4"	10	16	31,50	28,57	16,27	54,00
7/8"	9	14	36,75	33,33	19,05	86,20
1"	8	12	41,99	38,1	21,83	128,00

Materiale: Acciaio classe 8 / 10 UNI EN 20898; acciaio inossidabile A2 / A4 UNI 7323; ottone OT58.

Material: Steel class 8 / 10 UNI EN 20898; stainless steel A2 / A4 UNI 7323; brass OT58.

Dadi esagonali ANSI B 18.2.2

Hex nuts ANSI B 18.2.2

Ecrous hexagonaux ANSI B 18.2.2

Sechskantmuttern ANSI B 18.2.2

2H

d1	UNC fil. per pollice	8-UN fil. per pollice	e min.	s max.	m	peso (7,85 Kg/dm ³) Kg per 1000 pezzi
3/8"	16	-	19,38	17,46	9,13	15,00
7/16"	14	-	21,08	19,05	10,72	18,80
1/2"	13	-	24,61	22,22	12,3	30,00
9/16"	12	-	26,34	23,81	13,89	37,00
5/8"	11	-	29,84	26,99	15,48	54,00
3/4"	10	-	35,10	31,75	18,65	88,00
7/8"	9	-	40,36	36,51	21,83	134,00
1"	8	-	45,62	41,27	25	192,00
1.1/8"	-	8	50,85	46,03	28,18	290,00
1.1/4"	-	8	56,11	50,80	30,96	395,00

Materiale: Acciaio ASTM A194 gr. 2H.

Material: Steel ASTM A194 gr. 2H.